


1. Modem Installation

Important Note: Do NOT install your modem until you are notified by Westelcom that your DSL service is ready.

1. Filters should be connected to any phone lines that aren't attached to the DSL modem directly. You may not need a filter on your line if you do not hear any static on the line. If you have a splitter, than the same line that is attached to your DSL modem can be split for a phone extension as well.
2. Remove all the contents from the box.
3. Connect the AC power adapter to the circle end of it to the modem (1) and the other end to the wall outlet.
4. Connect one end of the phone cord to the modem on the back labeled DSL (4), and the other to a phone jack in the wall.
5. Connect one end of an Ethernet cable (one that looks like a phone cord but bigger) to the back of the modem (3) and the other end to the jack of your Ethernet port on your computer. (The Ethernet port is the one that looks like a phone jack only bigger.)
6. Turn your modem and computer on.
7. The DSL light will blink as it is searching for the DSL service. Once the light is solid the DSL is up.
8. The PC light will be solid when your computer is turned on, signifying that your Ethernet port is connected to the DSL modem successfully

Back of your modem will look like this.

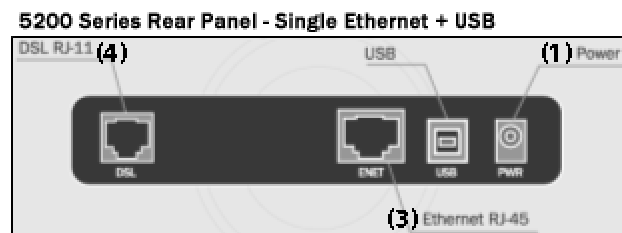

2. Next you will need to configure your Network Settings & Install your Broadband Software.

Choose A or B based on your Windows system version.

A. Instructions for Windows 95, 98, ME.

1. Go to Start > Settings> Control Panel.
2. Double click on Network (If you use Windows ME double click Network & Dial-Up Connections, right click Local Area Connection and select Properties).
3. Select the TCP/IP that is associated with your network card (You **do not** want to select the one that says TCP/IP Dial Up Adapter) Highlight and click Properties.
4. Select Obtain IP Address automatically.
5. Click on the Gateway Tab. Remove all information, if it is empty, proceed.
6. Click the DNS Configuration Tab and select Disable DNS.
8. Click OK, then OK again. Restart your computer if you are prompted to do so.

B. Instructions for Windows 2000, and XP.

1. Click on the Start Menu.
2. Select Control Panels.
3. Double Click on Network Connections.
4. Right Click on Local Area Connection and select Properties.
5. Click on Internet Protocol (TCP/IP) and select properties.
6. Make sure the button is checked that says 'Obtain an IP automatically' and 'Obtain DNS server address automatically'.
7. Click 'OK'.
8. Close the windows.

Broadband Installation Software – Windows 95, 98, ME, 2000, (XP-See Below).

1. Insert the 'Westelcom Installation CD'.
2. Select the 'Westelcom DSL Installer' option and follow the steps to Install the Tango PPPOE software. Restart your computer.
3. Upon Restart, double click the 'Tango Manager' icon on your desktop.

4. Select 'Access' from the left hand menu column.
5. Double-click 'Create New Profile'.
6. Enter 'Westelcom Braodband' as a name for the profile.
7. Click 'Next' and enter your username and password.
8. Click 'Next'. The wizard will then try to connect to a PPPoE server on our network. If it is successful, you will be logged in. Click 'Finish'. Your IP settings, DNS settings are automatically set when you connect with Tango.
9. In order to enable an automatic log-in at start-up double-click once more on the 'Tango Manager' icon on your desktop.

10. Select 'Home' and then 'Preferences' on the lower left of the window.
11. Check box the 'Launch on Startup' and 'Minimize at Startup'. This will automatically connect you to the internet when you Start-up your computer.
12. Double clicking on the profile you created in Tango will also Connect you to your Broadband account.

Instructions for Windows XP.

Windows XP comes with a built in PPPoE client. Please refer to your windows documentation on installation of this client. Tango will run on Windows XP if you wish to install Tango.

3. Setting-Up Your Outlook Express Email for Wireless Broadband

Choose A or B and follow the appropriate instructions.

A. If you already have your Outlook Express set up for your Westelcom Email account(s) you will need to change a couple of your settings.

Windows

1. Open Outlook Express, go to Tools>click Accounts. Click on the "Mail" tab, select the one that says "mail.westelcom.com", then hit "Properties". This will open up a new window
2. Click on the tab that says "Connection". You will want to change the option that says "Always connect to this account using a Dial-Up" to "Local Area Network."

B. If you are a new customer or have just never set up your Westelcom email account(s) in Outlook Express follow the instructions below.

Windows

1. Double click on the "Outlook Express" icon
2. If you are clicking on it for the first time it will ask you step by step instructions for setting up your email
3. If you are already an Outlook Express user, add a new account by Tools>Accounts > Add> Mail
4. Choose "POP3" as your Incoming Mail Server
5. Type "mail.westelcom.com" for Incoming and Outgoing Mail
6. The wizard will walk you through the steps
7. After you have done that, go to Tools>click Accounts. Click on the "Mail" tab, select the one that says "mail.westelcom.com", then hit "Properties". This will open up a new window.
8. Click on the tab that says "Connection". You will want to change the option that says "Always connect to this account using a Dial-Up" to "Local Area Network"

If you are a former AOL customer you will want to uninstall your AOL software. If you need help doing this please call our technical support at 1.866.FastTec.

Westelcom's



PC PPPoE Instructions for Installation

Customer Name: _____

Install Date: _____

Your Ethernet Modem Box Includes:

1. Ethernet Modem
2. RJ11 cord. This is the standard telephone cord.
3. Ethernet Cable. This is the cable that looks like a regular phone cord but has a bigger plug.
4. AC Power Adapter
5. (3) DSL filters.